

concept **Recmi**
INDUSTRIE

Let's discover...

... a new concept in stacking possibilities




Performance, it's that simple.



HIGH SPEED COMPENSATING STACKER TP 300L

New compensating stacker REcMI TP 300L invites you to work with a new dimension thanks to separate rotation and ejection process.

- Short cycle time
- Very good accessibility to all parts thanks to large pivoting guards
- JDF functions on request
- Easy to operate, easy to maintain
- Quick configuration change (left, right or straight-out ejection)
- Operating control panel interchangeable left/right position
- Rotation and ejection in two separate operations
- Horizontal crushing / jogging /separating sections prior to the stacking zone
- Bundle ejection module (option)

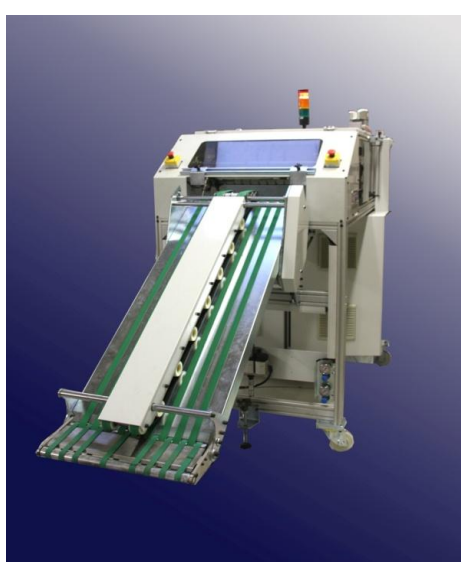

A Unique Compensating Process

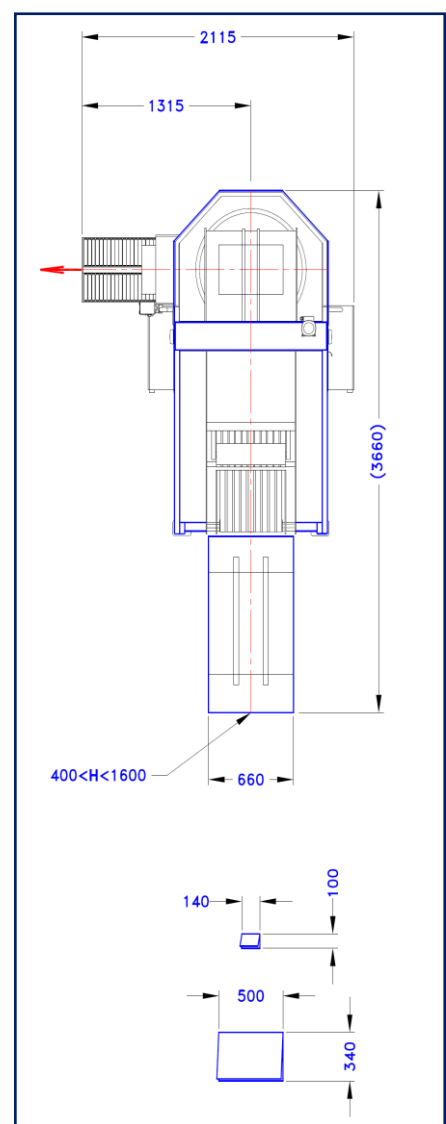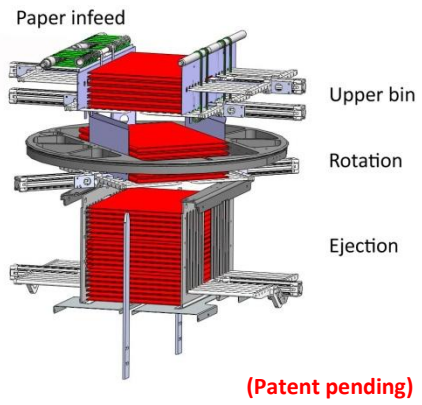

| Technical Specifications | |
|--------------------------|--|
| Product dimensions : | Mini : 100 x 140 mm Maxi : 340 x 500 mm |
| Product thickness : | 4 to 96 pages (depending on paper weight) |
| Speed : | 70 m/min – 100 000 products/hour (product permitting) |
| Stack height : | Upper bin : 150 mm Total stack : 300 mm |
| Infeed height : | Direct infeed : 1415 mm, adjustable from 400 mm to 1600mm with infeed conveyor |
| Delivery height : | 800 mm |
| Options : | JDF, straight out delivery, two arms pusher, infeed conveyor |